VNS2215

WIRELESS MULTI-COLORED BEACON LIGHT SET Wirelessly Activated Visual Signaling & Alerts

User-Programmable Alert Light Color, Operation Mode, Tone, and Duration

The VNS2215 Wireless Beacon Light is designed to provide high-impact visual alerts for indoor locations.

The VNS2215 Wireless Beacon Light can control one or two LED beacon light fixtures. Each VNS2215 wireless strobe light can be operated individually or as a part of up to seven zones for flexible unit activation from a main base station, personal panic buttons or wireless wall mounted call stations.

The VNS2215 can come with an optional wireless supervision module, that provides full monitoring of the device functionality, for improved site maintenance, system administration and over-the-air programming from a base station or a PC.



VNS2215 KEY FEATURES



FULL LIGHT CONTROLChange color, brightness, mode, tone and duration



ALERT MODESPick steady, slow flash, fast flash, and strobe



LONG LASSTING LEDS No maintenance or bulb replacement needed



EASY ACTIVATIONActivate from base station or wireless panic buttons



WEATHERPROOF Indoor or outdoor installation



FULLY SUPERVISEDPeriodic Status Alerts to
Monitoring Base Station




1287 BARCLAY BLVD

PHONE: 877-918-7243

BUFFALO GROVE, IL 60089 FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM **WEB:** WWW.VISIPLEX.COM

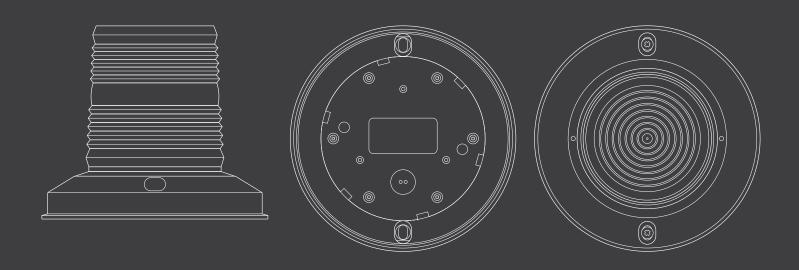

VNS2215 SPECIFICATIONS

Parameter	Description
Color	Off-white, programmable multi-color LED lights
Frequency Band	UHF 402-470 MHz, VHF (150-174 MHz)
Dimensions	6.2" x 6.2" x 4.9", 157mm x 157mm x 124mm (W x H x D)
Weight	4.7oz, 133g
Power	6-24V DC (Using 100-240V AC), POE option
Transmit Format	Narrow Band POCSAG Signalling
Operating Conditions	Temperature -22º-140º, Humidity 0-95% non-condensing
Programming	Internal USB Port or Over-the-air wireless commands from main paging base station
Mounting	Wall or Ceiling surface mounting
Options	VNS2252 (Battery Backup), VNS2254 (Supervision transmitter), VNS2281 (2nd PA Speaker driver), VNS2284 (Local PA/Fire alarm system interface), VNS2285 (Dry contact closure output), VNS2286 (Two-way radio interface), VNS2270 (Two-way intercom wall station)
Warranty	One Year Limited Warranty



VISIPLEX

1287 BARCLAY BLVD BUFFALO GROVE, IL 60089 FAX: 847-229-0259

PHONE: 877-918-7243

EMAIL: INFO@VISIPLEX.COM

WEB: WWW.VISIPLEX.COM