

VNS2216

WIRELESS TWO-WAY INTERCOM STATION SET Instant Voice Communication

Simple Operation, Easily Expandable, Reliable Communication

The VNS2216 Wireless 2-Way Intercom Station is designed to provide two-way communication in installations where traditional hard-wired intercom systems is impractical or too costly. In addition, the VNS2216 can drive one or two attached public address speakers for pre-recorded audio alerts or live voice announcements and control up to two beacon light fixtures to provide high impact visual alerts. The VNS2216 Wireless 2-Way Intercom Station can be activated and controlled individually or as a part of up to multiple groups/zones for flexible unit activation from a paging base station or wearable/wall-mounted panic buttons.

The VNS2216 wireless intercom station offers additional unique features such as: internal battery backup for power outage situations, wireless supervision for remote unit diagnostic and maintenance, background FM radio music and beacon lights for improved visual alert.



VNS2216 KEY FEATURES



TWO-WAY VOICE

Voice communication with main base station



AUDIO ALERTS

Works as PA speaker for alerts and announcements



HANDS-FREE

Respond without use of push-to-talk button



FULLY SUPERVISED

Periodic Status Alerts to Monitoring Base Station



POWER OPTIONS

Power with an AC outlet or low-voltage POE



BATTERY BACKUP

Built-in backup for power outages



VISIPILEX


1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPILEX.COM

WEB: WWW.VISIPILEX.COM

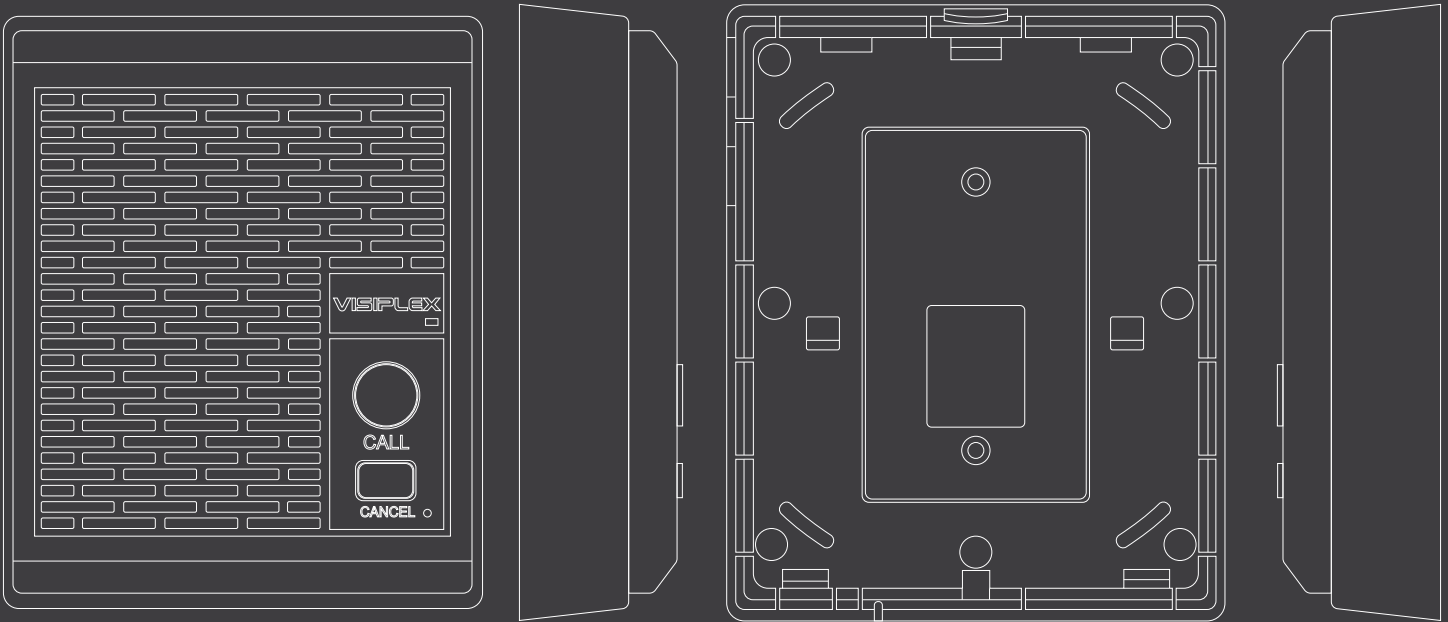

VNS2216 SPECIFICATIONS

Parameter	Description
Color	Light Grey with off-white mounting bracket
Frequency Band	UHF 402-470 MHz
Range	300'
Dimensions	6" x 7.3" x 1.9", 153mm x 185mm x 48mm (W x H x D)
Weight	22oz, 625g; With battery backup: 26oz, 735g
Power	9V DC Using 100-240V AC, POE option
Operating Conditions	Temperature 0°-120°, Humidity 0-95% non-condensing
Audio	4W Speaker
Programming	USB Port or Over-the-air wireless commands from main paging base station
Mounting Options	Surface mounting, fits standard electrical box
Paging Format	POCSAG, 512 or 1200 BPS
Channel Spacing	12.5 KHz - Narrow Band
Data Cable	25', CAT-5
Options	VNS2269 (Hands-Free), VNS2252 (Built-in battery backup), VNS2254 (Supervision transmitter), VNS2265 (Receiver for FM radio reception), VNS2281 (2nd PA Speaker driver), VNS2282 (Beacon light controlled outputs)
Warranty	One Year Limited Warranty



VISIPLEX

1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM

WEB: WWW.VISIPLEX.COM